1-888-883-1318
www.hydroroyal.com

HYDRO ROYAL HR/HE ORIGINAL SERIES HEAT PUMPS

EFFICIENCY & RELIABILITY

Heat your pool for less with Hydro Royal high-efficiency pool heat pumps.





HR/HE ORIGINAL SERIES

THE ULTIMATE WARRANTY

With a warranty covering seven years of parts and two years of labor, peace of mind is just a step away.

www.hydroroyal.com

AHRI CERTIFIED
www.ahridirectory.org

HYDRO ROYAL

HR/HE ORIGINAL SERIES HEAT PUMPS

Efficiency & Reliability

FEATURES & BENEFITS

Efficiency

Lower energy consumption compared to other heating types means more money in your pocket.

Warranty

Keep your machines running with a strong warranty.

Reliability

Every Hydro Royal heat pump is run tested to ensure proper performance.

Performance

Available with heat/cool functionality that can automatically heat or chill your pool to your desired temperature.


Quiet

Designed with your neighbor in mind. With an efficient scroll compressor, and larger, yet lower rpm fan, sound level is decreased.

Compatibility

Control all Hydro Royal heaters through an automation system or use the built-in display.

COST OF OPERATION

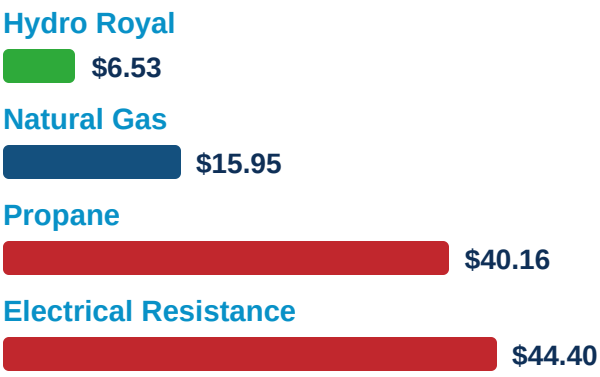

* Chart based on $3.07 per gallon LP Gas, $1.34 per therm. of natural gas, 15 cents per kilowatt, a heat pump with C.O.P. of 6.8, and gas heating with 84% thermal efficiency.

HYDRO ROYAL WARRANTY

Hydro Royal provides a no-nonsense warranty. No charges for full-warranty repairs (no trip charges). Parts are warranted for 7 years from the installation date. See warranty for terms and conditions on how to qualify. **www.hydroroyal.com**



Costs are based on 2024 national average fuel costs and efficiencies (source: Federal Register). All calculations are estimates. Actual results may vary due to a range of factors including, but not limited to: environmental conditions, pool type/construction/materials/configuration, geographical location, installation details, and operational parameters. Please consult your local provider for current pricing and cost estimates.

UNIT SPEC	HR/HE110-RA	HR/HE125-RA	HR/HE150-RA	HR/HE125-TA (HEAT/COOL)	HR/HE150-TA (HEAT/COOL)
BTU/COP (80/80/80)	110,000/6.1	118,000/6.0	138,000/6.0	115,000/6.0	135,000/6.0
MIN AMPS / MAX BREAKER	37/40	37/50	37/50	37/50	40/50
DIMENSIONS (SHIPPING)	31X31X38 (33X31X43)	31X31X46 (33X31X50)	31X31X46 (33X31X50)	31X31X46 (33X31X50)	31X31X46 (33X31X50)

***All units meet or exceed the AHRI Low (50/63/80) Test Point with a COP of 4.0 or higher**